
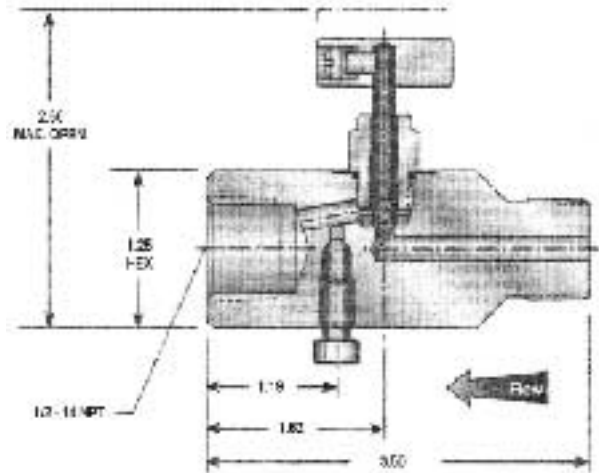
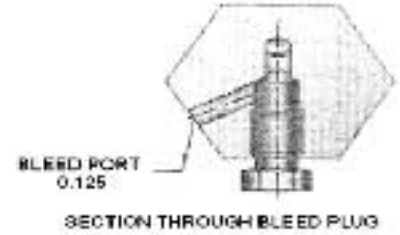



STAINLESS STEEL M X F BLEED VALVE

SERIES : SPVB-6000

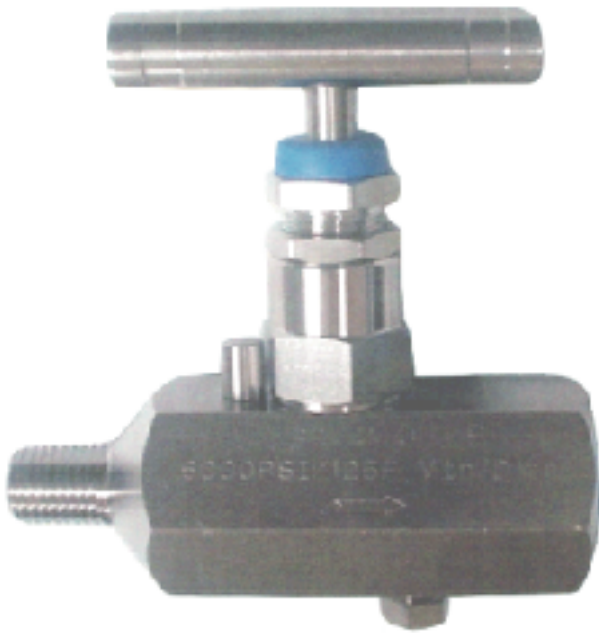

STANDARD MATERIALS

METAL SEAT

VALVE	BODY	BONNET	STEM	PACKING	BLEED PLUG	SEAT
SS	A479-316 SS	A479-316 SS	A276-316 SS	TEFLON, BUNA-N O-RING OR GRAFOIL	A276-316 SS	INTEGRAL

SOFT SEAT

VALVE	BODY	BONNET	STEM	PACKING	FLOW WASHER	BLEED PLUG	SEAT
SS	A479-316 SS	A479-316SS	A276-316 SS	TEFLON OR VITON O-RING	316 SS	A276-316 SS	PCTFE

PRESSURE & TEMPERATURE RATINGS


RATING WITH TEFLON OR GRAFOIL BONNET

HARD SEAT	6000 psi @ 200° F
	414 bar @ 93° C
DELFIN & PCTFE	3000 psi @ 200° F
	207 bar @ 93° C

RATING WITH O-RING BONNET

HARD SEAT	6000 psi @ 200° F
	414 bar @ 93° C
DELFIN & PCTFE	3000 psi @ 200° F
	207 bar @ 93° C

PRESSURE VS TEMPERATURE

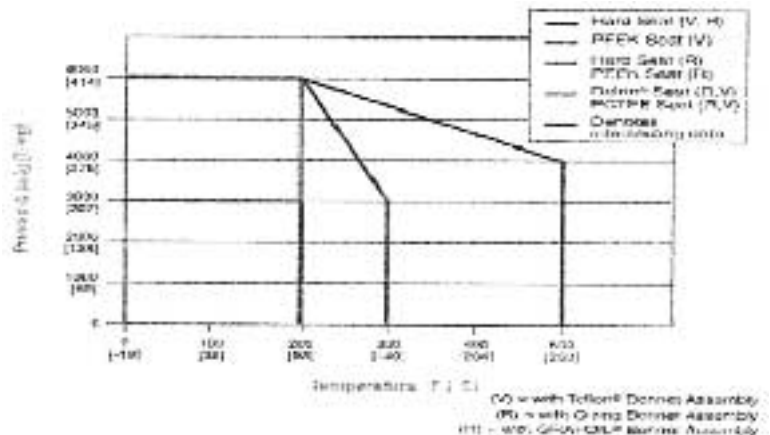

* Due to the continuous development of our products, design or construction may change without prior notice