

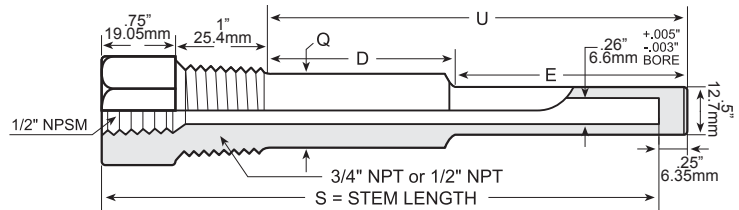




THERMOWELL

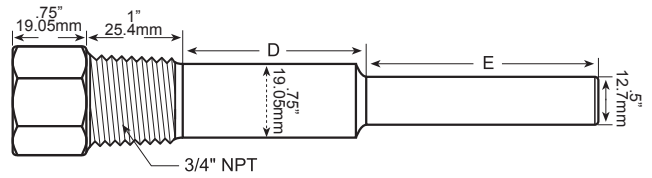

CODE	S (STEM LENGTH)	THREAD	A	D	E	Q	MATERIAL
TW-STEP-22-2.5S	2.5"	1/2"NPSM-F x 1/2"NPT-M	28.5mm(1.12")	-----	25.4mm(1")	15.88mm(5/8")	304-304SS
TW-STEP-22-4S	4"	1/2"NPSM-F x 1/2"NPT-M	28.5mm(1.12")	-----	63.5mm(2.5")	15.88mm(5/8")	
TW-STEP-22-6S	6"	1/2"NPSM-F x 1/2"NPT-M	28.5mm(1.12")	50.8mm(2")	63.5mm(2.5")	15.88mm(5/8")	316-316SS
TW-STEP-22-9S	9"	1/2"NPSM-F x 1/2"NPT-M	28.5mm(1.12")	127mm(5")	63.5mm(2.5")	15.88mm(5/8")	
TW-STEP-32-2.5S	2.5"	1/2"NPSM-F x 3/4"NPT-M	32mm(1.25")	-----	25.4mm(1")	19.05mm(3/4")	BR:Brass
TW-STEP-32-4S	4"	1/2"NPSM-F x 3/4"NPT-M	32mm(1.25")	-----	63.5mm(2.5")	19.05mm(3/4")	X:SPECIAL
TW-STEP-32-6S	6"	1/2"NPSM-F x 3/4"NPT-M	32mm(1.25")	50.8mm(2")	63.5mm(2.5")	19.05mm(3/4")	MATERIAL
TW-STEP-32-9S	9"	1/2"NPSM-F x 3/4"NPT-M	32mm(1.25")	127mm(5")	63.5mm(2.5")	19.05mm(3/4")	

U = Insertion length
U = D + E

Specification:

SS 316 THERMOWELLS

3/4" NPT male x 1/2" NPSM female, or 1/2"NPT male x 1/2"NPSM female

From one piece bar stock

Part number Stem length

TNTW32-2.5S 2.5"

TNTW32-4S 4"

TNTW32-6S 6"

TNTW32-9S 9"

TNTW22-2.5S 2.5"

TNTW22-4S 4"

TNTW22-6S 6"

TNTW22-9S 9"